


Messages for Java Programmers

Damien Cassou, Stéphane Ducasse and Luc Fabresse

W2S02



<http://www.pharo.org>

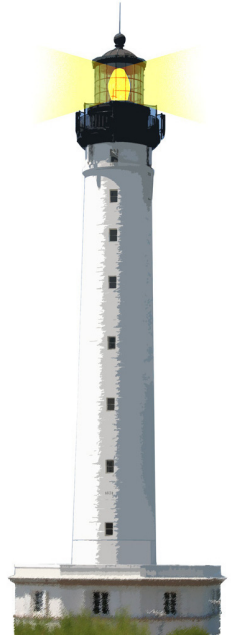

Only Objects and Messages

- code in Pharo **only** manipulates objects: mouse, booleans, arrays, numbers, compressed, strings, windows, scrollbars, canvas, files, trees, compiler, sound, url, socket, fonts, text, collections, stack, shortcut, streams, ...
- messages and assignments are the only way to do something



Equivalence

In Java

```
ArrayList<String> strings = new ArrayList<String>();
```

In Pharo

```
strings := OrderedCollection new.
```

- 1 assignment, 1 message sent
- new is a message sent to a class
- no static typing
- no generics



Equivalence

In Java

```
Thread regThread = new Thread(  
    new Runnable() {  
        @Override  
        public void run() {  
            this.doSomething();  
        }  
    });  
regThread.start();
```

In Pharo

```
[ self doSomething ] fork
```



Equivalence

In Java 8

```
new Thread(() -> this.doSomething()).start();
```

In Pharo

```
[ self doSomething ] fork
```

Three Kinds of Messages

- Unary

5 factorial
Transcript cr

- Binary

3 + 4
5 → 10

- Keyword-based

Transcript show: 'hello world'
2 between: 0 and: 5



Keyword Messages for Java developers

In Java

```
receiver.keyword1keyword2(arg1, arg2)
```

In Pharo

```
anObject keyword1: arg1 keyword2: arg2
```

Keyword Messages for Java developers

In Java

```
postman.send(mail,recipient);
```



Keyword Messages for Java developers

```
postman.send(mail,recipient);  
postman . send ( mail , recipient );
```

Keyword Messages for Java developers

```
postman.send(mail,recipient);  
postman . send ( mail , recipient );  
postman send mail recipient
```

Keyword Messages for Java developers

```
postman.send(mail,recipient);  
postman . send ( mail , recipient );  
postman send mail recipient  
postman send mail to recipient
```

Keyword Messages for Java developers

```
postman.send(mail,recipient);  
postman . send ( mail , recipient );  
postman send mail recipient  
postman send mail to recipient  
postman send: mail to: recipient
```

Keyword Messages for Java developers

In Java

```
postman.send(mail,recipient);
```

In Pharo

```
postman send: mail to: recipient
```

- the message
 - is named `send:to:`
 - is sent to `postman`
 - includes two arguments (`mail` and `recipient`)



Conditionals are Just Messages

- in Java, if, else, for, while, do, ... are language keywords
- in Pharo, conditional expressions are messages
- booleans are objects

```
fullName isEmpty  
  ifTrue: [ 'FirstnameLastname' ]  
  ifFalse: [ fullName ]
```

Loops are Just Messages

```
4 timesRepeat: [ self doSomething ]
```

```
0 to: 100 do: [ :i | ... ]
```

```
0 to: 100 by: 3 do: [ :i | ... ]
```

```
aCollection do: [ :each | ... ]
```

Summary

- Three kinds of messages: unary, binary and keywords
- $() > \text{unary} > \text{binary} > \text{keywords}$
- Conditionals are messages
- Loops too



A course by



and



in collaboration with



Inria 2020

Except where otherwise noted, this work is licensed under CC BY-NC-ND 3.0 France

<https://creativecommons.org/licenses/by-nc-nd/3.0/fr/>